




LTI Smart Glass, Inc.
14 Federico Drive / Pittsfield, MA 01201
+1 413-637-5001 / (f) 413-637-5004
www.LTISmartGlass.com

PM1210 Power Module Data & Wiring Schematic

NOT TO SCALE

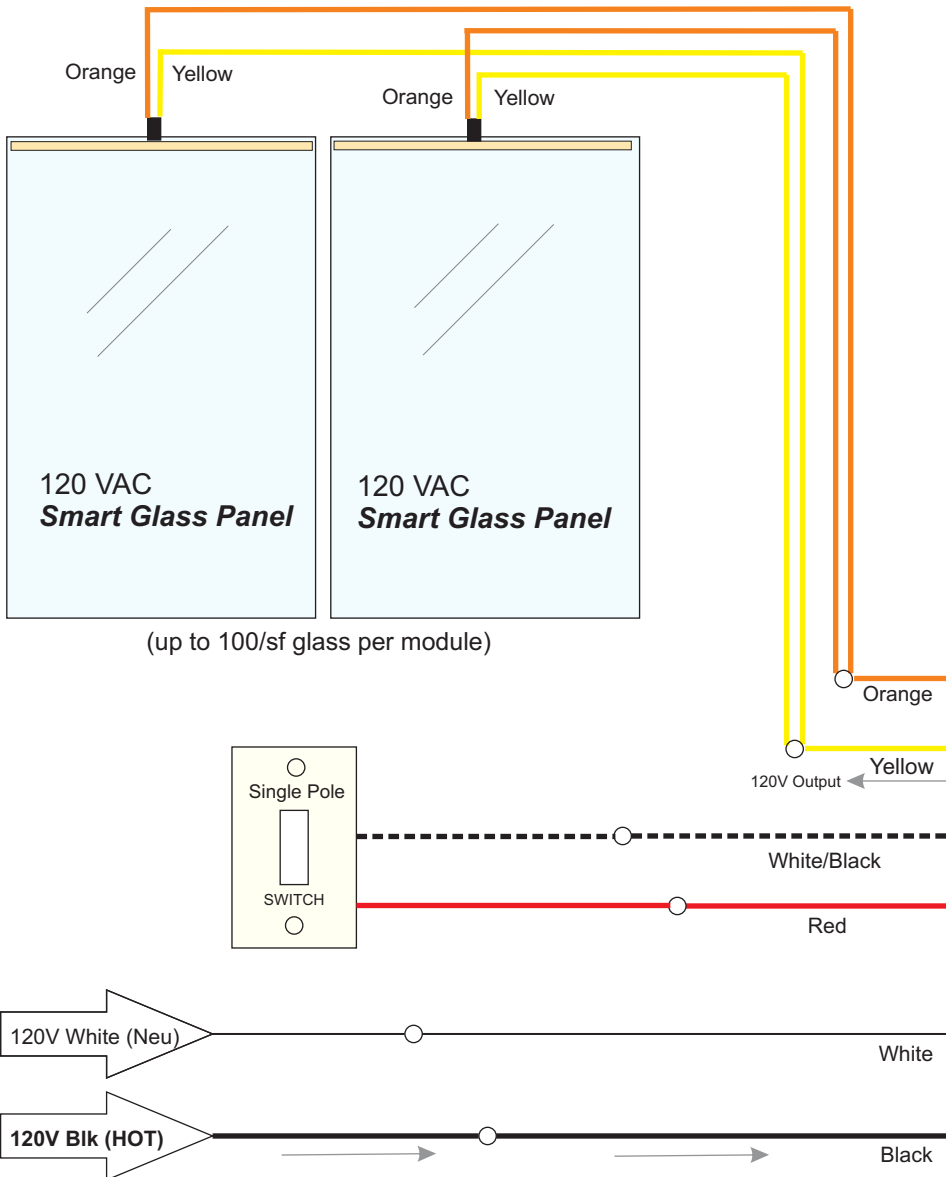

UL Listing Category
IYQX.E216500
LTI Smart Glass

SGULLC.0110 switchable privacy glass

PM1210 Power Module features a standard 4"x4" double-gang plate face, with extended mounting ring for easy installation to mount to any standard double-gang junction box.



Specifications:

Dimensions of Case: 4"w X 4"h X 2"d
Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140 degrees Fahrenheit
Humidity Range: 5 to 95% (non-condensing)
Wires: 18ga
Ratings: 5A Max @ 120 VAC Yellow Wire
Input: 120VAC
Output: 120VAC
Coil Current: 28mA @ 120VAC



5-amp
circuit
breaker